




OPERATION INSTRUCTIONS FOR BCBA06  
WIRELESS ELECTRONIC BITE ALARM SYSTEM

**Bite alarm units**

- 8 tones settings
- 8 volume settings
- 5 sensitivity settings
- 15 sec latching LED
- 8 magnet rollers
- Running LED (all are white)
- Push button LED dimmer
- Black satin smooth finish
- Colorful light rollers
- 220-280 meters
- Operates with the 1.5V \* 2 batteries
- 2.5mm jack socket
- Memory function in bite alarm
- Removable storm ears
- Low battery function

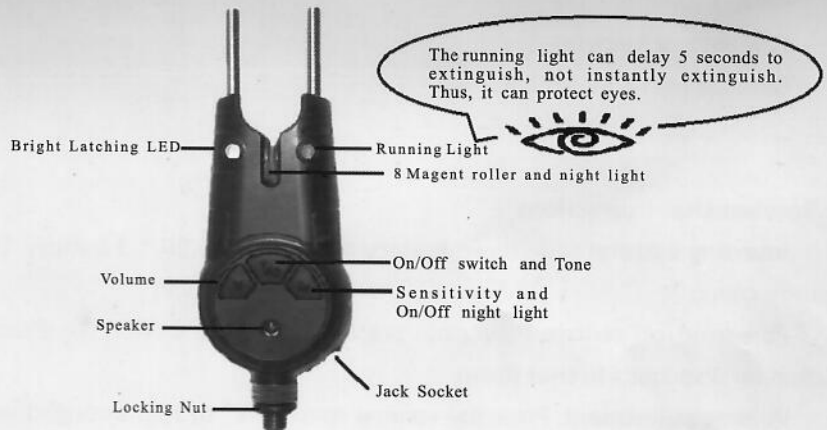

**Alarms User Instructions**

**Inserting Batteries:** Slide down battery cover, insert 1.5V \*2 battery. To complete the procedure, gently push back the battery cover.

**Power On/Off Switch:** Power on- Press the T/power button for 3 seconds to turn on. Power off - Press the T/power button for 3 seconds to shut down.

**Volume adjustment:** Press the volume control "V" to step through the 8 volume settings ranging from low to high and silent mode.

**Tone adjustment:** Press the tone adjustment button "T" to step through the 8 settings .

**On/Off Light switch:** Press the light control "S" to set ON/OFF night light. Press the "S" button for 3 seconds to turn on the night light, and then press 3 seconds to turn off the night light.

**Sensitivity adjustment:** Press the sensitivity adjustment button "S" to step the 5 sensitivity settings , ranging from Minimum to Maximum mode.1 beep equals maximum sensitivity to 5 beeps minimum sensitivity .

**Run indication / Low battery indication:** Low voltage detection, when the voltage is lower than 2.5V, the running light will flash for 5 seconds.

**Transmitter :**

- Power Voltage : 1.5V\*2
- Standby Current : 35uA
- Working current : 70mA
- Shut down current : 14uA
- Turn on night light standby current: 1.2 m A
- Working Power : 12dB
- Frequency : 433MHz
- Coverage range : 220~280m
- Working Temperature :-10 ~70°C

**Receiver :**

- Power voltage : 1.5V \*3
- Standby Current : 0~2.5mA
- Working current : 50mA
- Shut Down Current : 40uA
- Receiving Sensitivity : -105dB
- Frequency : 433MHz
- Coverage Range : 220~280m
- Working Temperature :-10 ~70°C

### Receiver units

- 8 tones settings
- 8 volume settings
- 5 colors clear LED choices
- Vibration mode/Silent mode
- 5 LED dimmer
- 220-280 meters
- Memory function in receiver
- Learn and erase code
- Low battery function
- Operate with 1.5V \* 3 batteries



### Receiver User Instructions

**Inserting battery:** Slide down battery cover, insert 1.5V \* 3 battery. To complete the procedure, gently push back the battery cover.

**Power on/off switch:** Power on: press the V/power button for 3 seconds to turn on. Power off: press the V/power button for 3 seconds to shut down

**Volume adjustment:** Press the volume control "V" to step through the 8 volume settings, ranging from low to high and silent mode.

**Vibration adjustment:** Press the vibration button to choose vibration mode on or off.

**Low battery indication:** When the voltage is lower than 3.2V, the bottom purple light will flash for 5 seconds.

**Learning method:** Press the "M" button for 3 seconds to enter the code mode, then click the "M" button to jump the light to select the code position. After the position is selected, turn the transmitter wheel, the receiver light starts flashing when it receives signal and the sound rings, that is to complete the code. When you need to learn other bite alarm, repeat the above operation.

**Erase method:** Long press the "M" button for 6 seconds to clear the code mode, all the lights lit, and the sound dripped twice, erasing successfully, and all code of bite alarm which had been stored are erased.

### BearCreeks GmbH

Marie-Curie-Str. 6, 85055 Ingolstadt, Germany  
Tel: +49 841 13803990 Fax: +49 841 13803988  
Email: sales@bearcreeks.com  
www.bearcreeks.com  
<https://www.facebook.com/BearCreeksGmbH/>