



BearCreeks

Born to be free

OPERATION INSTRUCTIONS

FOR BCBA04 SET

BearCreeks GmbH
Marie-Curie-Str. 6, 85055 Ingolstadt, Germany
Tel: +49 841 13803990 Fax: +49 841 13803988
Email: sales@bearcreeks.com

OPERATION INSTRUCTIONS – BCBA04 SET

FEATURES LIST

- Ultra bright long life LEDS
- Adjustable multicolour LEDS in 7 different cool colours of your choice (Blue, Red, Green, UV-Blue, Purple, Yellow and White)
- Extremely compact design in ergonomically combined materials
- Remote range self testing whereby you can make 100% sure the alarms and receiver are in remote range
- Micro adjustable sensitivity
- Adjustable volume and tone
- Night light function using a special long life diode that requires very little power
- 20 seconds after glow period on both the alarm and the receiver
- Power out socket for illuminated hangers or bouncers
- Battery low warning on both the indicators and the receiver
- Memory function on both the indicators and the receiver that memorizes all setting when switched off
- Manual on/off switch
- Range 100--150m in a non-disturbed area
- Rolling code function that makes sure that your bite alarm does not interfere with other user
- Tone off vibration function in receiver
- Connection ring on receiver to secure it
- All weather construction
- Body made out of high impact ABS material and the special reinforced screw part is manufactured out of stainless steel
- Non-slop rod support for precise indication
- The bite alarm operates on a 9V battery and the receiver on 9V batteries

OPERATION INSTRUCTIONS – BCBA04 SET



- Range: 100--150Ms depend on surrounding condition
- Self-Range testing Function:

Before testing please make sure both of alarm and receiver are well coded.

Step 1: Switch on the receiver.

Step 2: When the bite alarm is under the Power off condition, turn on "S" to the top-end position.

Step 3: Switch on the alarm and you will heard a continuing beeps.

Step 4: Quit the range testing please Switch down the alarm.

- 20" latching LED
- Low Battery Detection Function:


The alarm will warn you with short "beep" when the batteries of alarm are weak.

- **Lite Rolling Coding System:**

Step 1: Please switch on the alarm when coding with receiver

Step 2: Turn "L" to select the color of your LED
(Please see coding procedures in the Receiver Instruction)

OPERATION INSTRUCTIONS – BCBA04 SET

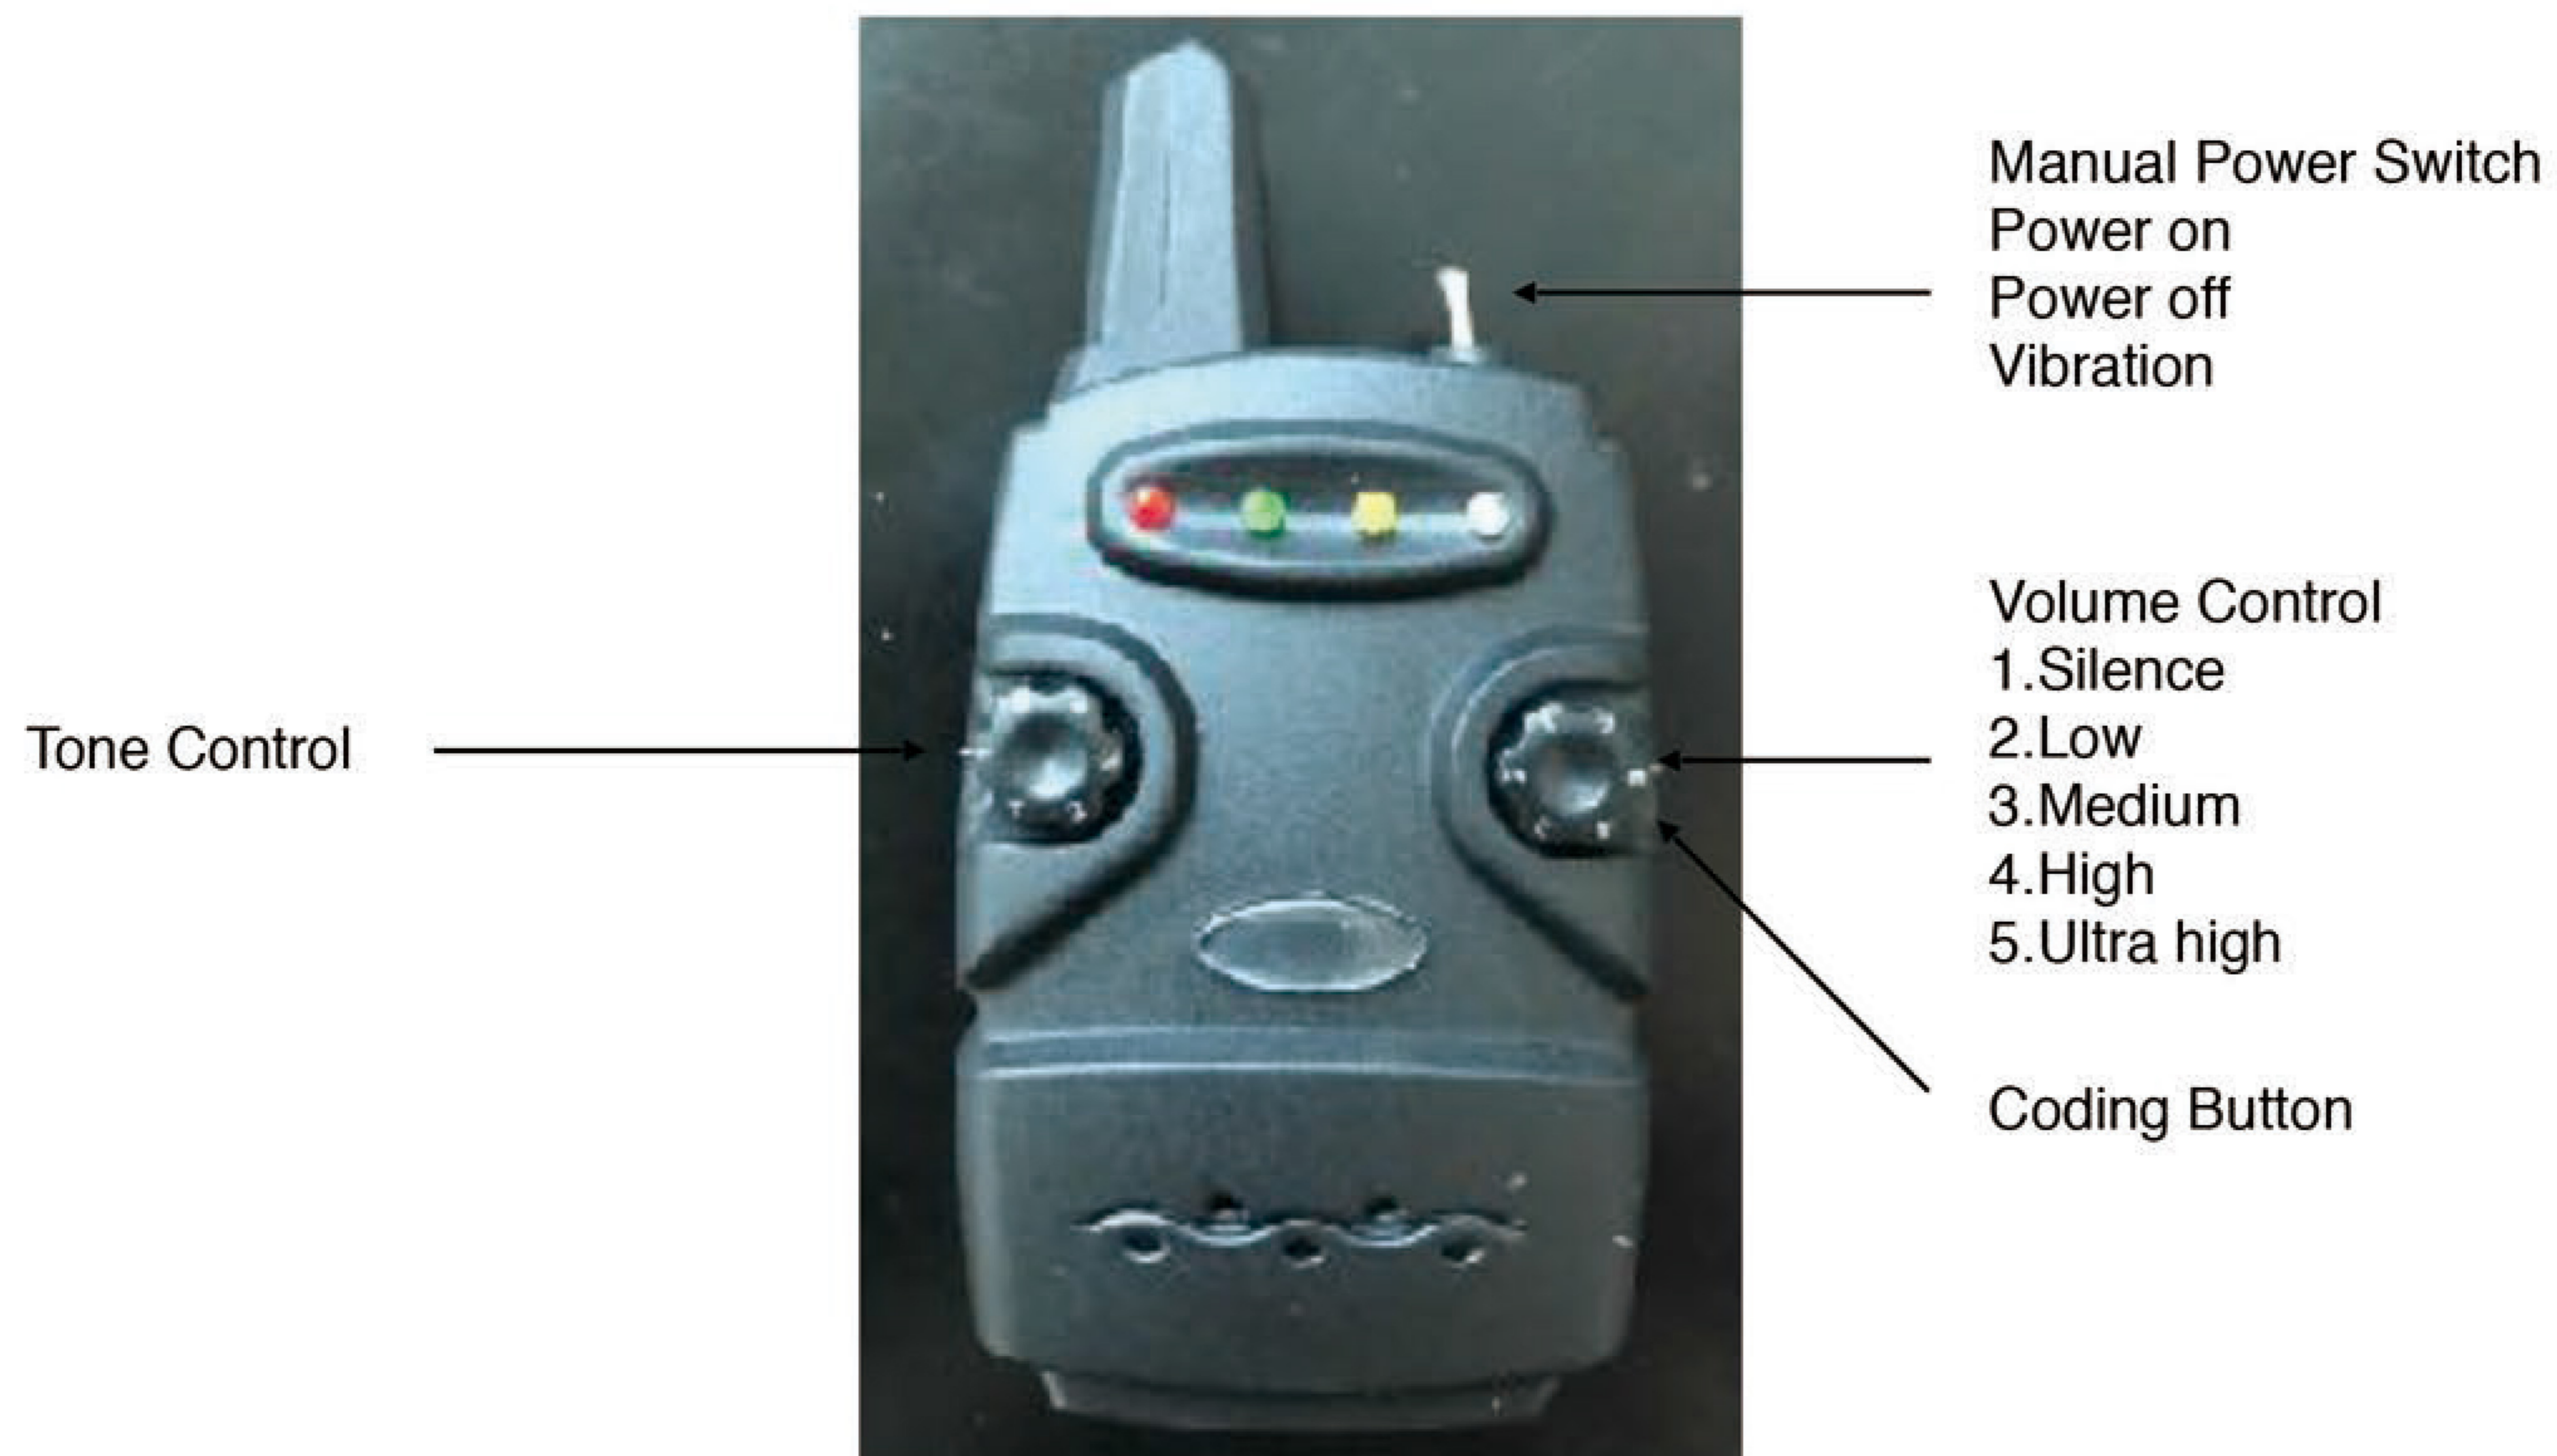

- **Low Battery Detection Function:**

The receiver will warn you with short “beep” when the batteries of receiver are weak.

- **20” latching LED**

- **Lite Rolling Coding System:**

Step 1: Under power off condition, hold down “Coding button”, meanwhile switch on “Manual Power Switch”, Release the “Coding button” when all LEDs flashing.

Step 2: Press “Coding button” to select the color and the location of your LED on the receiver.

Step 3: Switch on the Alarm (see alarm instruction), Please select the color of LED on the alarm by turn “L”

Step 4: To activate the system, please roll the wheel in the middle of alarm. They will be connected once the receiver gives the reaction.

Step 5: Please restart the receiver to finishing the coding.